1-800-799-NADA

NADA SCIENTIFIC

nadascientific.com

MARINE INBOARD DIESEL ENGINE, 8-CYLINDER WITH TURBO INTERCOOLER

N98-ND7950HI

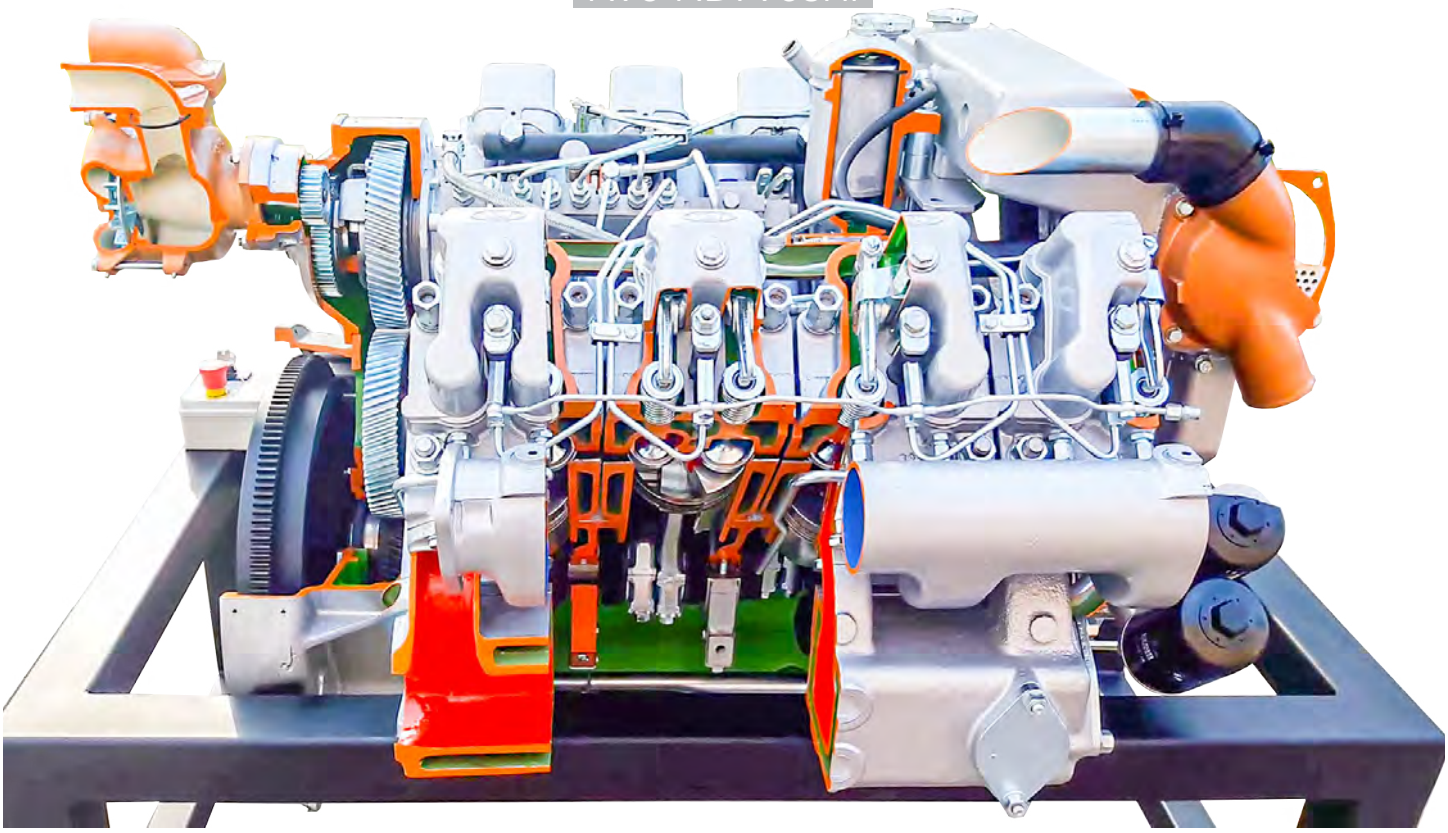

SPECIFICATIONS

- 4 stroke diesel engine
- Direct Injection
- Aspiration: Turbocharged - Interrefridgerated
- 8 cylinders
- Bore x stroke: 130 x 140mm
- Total displacement: 14858cm3
- Operates electrically at 120 volt
- Mounted on stand with wheels

PERFORMANCE

- Power pleasure boat DIN 6270 "B": 320 CV (235Kw) at 2000 rpm
- Power fishing boat DIN 6270 "A": 280 CV (205Kw) at 1800 rpm
- Fuel consumption: 162 gr/HP-hr

STANDARD EQUIPMENT

- 4.8KW - 24V starter motor
- 45A - 28V alternator
- Lube-oil, Fuel, and Air filter
- Freshwater engine cooling system with seawater heat exchanger
- Engine and reserve/reduction gear lubrication oil cooled by a seawater heat exchanger
- Freshwater cooled exhaust manifold
- Bronze seawater circulating pump
- Centrifugal pump for freshwater circulation
- Scavenge oil hand pumps

WEIGHT AND DIMENSIONS

Size: 120cm x 185cm x150cm (L x W x H)
Net Weight: 600 kg
Gross Weight: 700 kg

OPERATES ELECTRICALLY

MOUNTED ON STAND WITH WHEELS

Version2.1.JL112020